

LAW OFFICES OF  
**JACOBSON, PRICE, HOLMAN & STERN**  
PROFESSIONAL LIMITED LIABILITY COMPANY

HARVEY B. JACOBSON, JR.  
D. DOUGLAS PRICE  
JOHN CLARKE HOLMAN  
SIMOR L. MOSKOWITZ  
MICHAEL R. SLOBASKY  
MARSHA G. GENTNER  
JONATHAN L. SCHERER  
IRWIN M. AISENBERG  
WILLIAM E. PLAYER  
YOON S. HAM  
LEESA N. WEISS  
ANDREW J. GRAY, IV  
PETER S. WEISSMAN  
KASEN H. JACOBSON\*

THE JENIFER BUILDING  
400 SEVENTH STREET N.W.  
WASHINGTON, D. C. 20004  
(202) 638-6666

October 23, 1998



OF COUNSEL  
MARVIN R. STERN  
BRIAN B. DARVILLE

TELEFAX  
(202) 393-5350  
(202) 393-5351  
(202) 393-5352

TELEGRAPH  
LAWPAT WASHINGTON D.C.

E-MAIL  
JP@JPHS.COM

\*BAR OTHER THAN D.C.  
WRITER'S DIRECT NO.

PATENT AGENT  
TANIA KEEBLE

Atty. Docket: P63073US0

Assistant Commissioner of Patents  
Washington, D.C. 20231

Sir:

Transmitted herewith for filing is the patent application of  
**Antonio Jorge SCHÜTZ** for **PROCESS FOR THE CONTINUOUS MANUFACTURE OF SAUSAGES**. The application comprises a 23-page specification including 3 claims (1 independent) and Abstract, 6 sheets of drawings, and a Declaration and Power of Attorney.

Accompanying the application for filing is:

Small Entity Declaration under 37 C.F.R. Section 1.19 and 1.27.

The filing fee has been calculated as shown:


Basic Fee for Small Entity:	\$ 395.00
Total Claims 3 - in excess of 20 = 0 (x \$11.00=)	.00
Total Ind. Claims 1 - in excess of 3 = 0 (x \$41.00=)	.00
	+
<b>TOTAL FILING FEE</b>	<b>\$ 395.00</b>

Check No. 39884, in the amount of \$395.00, is enclosed to cover the Filing Fee. The Commissioner is hereby authorized to charge payment of any fees set forth in §§1.16 or 1.17 during the pendency of this application, or credit any overpayment, to Deposit Account No. 06-1358. A duplicate copy of this sheet is enclosed.

Respectfully submitted,

JACOBSON, PRICE, HOLMAN & STERN, PLLC

By

  
John C. Holman  
Reg. No. 22,769

jrc

10/23/98  
jc408 U.S. PTO

RECEIVED - 10/23/98

The instant invention relates to a novel process for the continuous manufacture of sausages, to a machine for carrying out said process and to the product thus obtained.

## BACKGROUND OF THE INVENTION

At present, it is known that stuffed food, particularly sausages, are stuffed into a tripe or synthetic material (plastics) tube which then have to be "peeled" in order that the sausage may be packed.

Known processes are comparatively expensive and time consuming, since they require steps that are deleted by the use of the method of the invention. In fact, summarizing the present operation, the food material is stuffed into a very long synthetic tripe compacted into a cartridge and, once stuffed with paste, it is twisted in pre-determined regions to form a string of independent sausages, of a determined length, which are hung in cooking conveyors. After this operation, sausages are let to cool in order to subject them to the action

Known processes for manufacturing skinless stuffed food materials require four machines, namely: a) stuffer; b) twister and cooler; c) peeler and d) packager. Between the twisting and peeling steps, stuff such as sausages, large sausages, etc. are cooked. After cooking, the product is passed to the cooler and peeler, then conveyed to the packaging machine. Once packaging is ready, sausages are passed to the delivery section.

This conventional manufacturing line requires a minimum space of twelve meters long for the five processes mentioned, which results in an important investment in building and machinery.

Technology has developed new packaging processes, but these improvements took place for packaging products in the form of granules, powder or liquids, wherein the quality control of the product to be packed is controlled by a dispenser device, and pressure exerted on a product to shape the package is not required.

Further, these processes are not continuous, but are of intermittent sequence. Therefore, their production capacity is seriously limited as compared to a continuous process.

In the specific case of German type sausages packaging, the possibility of a continuous process is difficult due to the cooking step, as well as due to the fact that the sausage paste takes the shape of the package, which requires certain pressure in the packaging step. This pressure is what determines that the cross section of the package be rendered uniform and, consequently, the product weight constant.

Also, another disadvantage in the continuous process is the requirement that the package forming the sausage is the final package directed to consumers in order to avoid pollution of the product, in case such product after being shaped and cooked is introduced into a final package.

US Patent No. 5,063,239 discloses a process and apparatus for manufacturing German type sausages, which describes producing the sausage directly into the final package, which then allows cooking the sausage paste thus packaged.

However, although the mentioned process affords an improvement over the known process, this process is of intermittent sequence and requires synchronism between feeding of the portions forming the sausage and the transversal closure means of the package. Since said patent does not show the machine for producing said sausage paste portions of a pre-

2025 RELEASE UNDER E.O. 14176

determined size, it does not specify the way in which operation control is carried out to attain synchronism of the package cross closure means, we may consider this process inapplicable.

In fact, from the reading of the mentioned patent and drawings, it may be seen that feeding tubes 1 extend between peripheral channels of cylinders 14 and 15 up to the outlet port close to the molding means, comprised by rollers 4 and 5 which have elements transversely pressing the tubular packing portions without sausage paste. The specification of US patent No. 5,053,239, also does not explain the way in which small portions of sausage paste are passed through a feeding tube or the means used in order that each sausage portion maintains a constant space with the respect to the following one. Further, for the transversal sealing of the film, the process requires that such region be free of sausage paste, this being an outstanding difference with the method of the instant invention.

Also known is the system provided by Argentine Patent No. 228,903, which comprises a discontinuous feeding system. This systems operates by feeding molding cavities between sheets which are longitudinally welded, but the cavities of which are communicated by minor channels, producing a zigzag travel between sheets, then the regions into which channels are included are sealed.

Several trials have demonstrated that it is very difficult to obtain proper operation of this process, since paste pressures and differences in passage sections, as well as the zigzag arrangement produce at least an effect braking displacement, which at least reduces production to non profitable limits.

#### **SUMMARY OF THE INVENTION**

The process and machine of the instant invention afford the production of stuffs in general, particular of sausages, in a continuous way, using a single container which may be molded with the product pressure; the filled container having a cross section and a longitudinal measure of the container.

In the particular case of packaging German kind sausages, sausage packaging is attained without the use of synthetic tripe for shaping the sausage. This feature notably reduces the high cost of the conventional method, since said tripe should have a high amount of requirements for shaping uniform skin sausages, without wrinkles. Therefore, the cost is highly increased by the technology involved in manufacture.

The sausage is packed into the final package and then is subjected to cooking, which warrants non pollution of the product during the production process, and steps of tripe shaping and further peeling are prevented.

The pressure under which sausage paste is packed prevents any possibility of air within the package.

Further, the process and machine of the instant invention has important economic advantages, such as reduction of the costs of raw material required for manufacturing by the elimination of synthetic tripe, which is unavoidable in the conventional process; reduction of handling operations, since the sausage manufactured with the instant process and machine, as will be seen below, passes to cooking and then, directly, to delivery; reduction of 8% losses produced in the conventional process, these losses being almost completely eliminated; an important increase in production yield, since the machine of the invention, operating at a minimum speed, affords four times the production of conventional plants. At a higher speed, production could be increased eight times without difficulties. Further, the decreased surface of the production plant is also important, since the invention is comprised by a single machine of reduced size (2 meters), as compared to known machines requiring 12 meters. A further feature is a higher production speed as compared to conventional machines.

The continuous process for continuous manufacturing of sausages of the instant invention, is comprised by the following steps:

. continuous feeding of a pair of sheets, one above and the other below tubes feeding the paste forming the product to be packaged, continuously forming at the upper sheet individual molds for the product to be packed;

. simultaneously forming at the lower sheet, individual molds corresponding to the molds of the upper sheet, but connected one to the other by cavities narrower than those of said individual molds, the size of which allows the housing of feeding tubes;

. tensioning the sheets at least at the sealing regions between them;

. longitudinally sealing the sheets on both sides of said individual molds;

. advancing said individual molds thus formed beyond the outlet of said feeding tubes, closing under pressure the narrowest cavity at the front region of the mold;

. filling the product to be packed under proper pressure, in a continuous way, along with the container of sheets shaped by the molds;

. pressure closing the narrowest cavity at the rear portion of the individual mold thus filled in, closing in turn the front part of the following mold, and

. heat sealing the narrowest cavities closed under pressure.

Further, the machine for carrying out the process of the invention constitutes an additional object of the invention. The machine comprises a pair of rollers, contacting in a parallel and tangential manner, driving corresponding thermoplastic sheet materials, one of said rollers having means

2025-10-10 10:00:00



for shaping half of the individual molds of the product to be packed, while the other roller is also provided with means for shaping half of the individual molds for the product to be packed, said other halves being provided with means communicating one with the other; a device for feeding the product to be packed having a plurality of feeding means extending between said sheet materials, through the communication means of said other roller. Both rollers are provided with means for sealing planar joints of said sheet materials, means for cooling said planar joints at the outlet of said rollers and means for pressing and sealing the transversal joints of said individual molds thus formed. At the outlet end of the machine, following said pressing and sealing means, there are means for cutting excess sheet material from the packed product and means for wrapping said excess sheet material.

According to a feature of the invention, means forming half of the individual molds of the product to be packed at each roller, comprise channeled surfaces formed as per cylindrical modular envelope portions, fixedly removable engaged to said rollers.

Further features of the object of the invention will be described hereinbelow.

BRIEF DESCRIPTION OF THE DRAWINGS

0947080-1039

Taking into account the above mentioned objects, and related ones, the invention will be described on the basis of construction and parts combination details, as disclosed in the following preferred embodiment of the invention, taking in connection with the accompanying drawings, in which:

Figure 1 is a schematic longitudinal section of the machine of the invention, showing the process sequence, illustrating its general constitution and arrangement of the forming elements.

Figure 2 is a plan view of the machine showing the feeding and shaping upper rollers of the sheet material and conveying chains with welding cross members, the first portion being shown in a partial section.

Figure 3 is a perspective view of both shaping rollers, seen from the feeder of the product to be packed.

Figure 3 A is a perspective schematic view showing an embodiment comprised by modular envelope sections for the channeled surface forming such rollers.

Figure 3 B is a perspective view similar to that of figure 3 A showing said assembled sections for obtaining longer sausages.

Figure 4 is a partial cross section of a front elevation of shaping rollers and feeding tubes arrangement.

86E29T-0202T60

Figure 5 is a partial cross section of the contact of both shaping rollers when the corresponding channeled surfaces coincide.

Figure 6 is a cross section similar to that of figure 5, showing coincidence between the cylindrical portions of both shaping rollers and the passage of the feeding tube.

Figure 7 is a perspective view of the transversal mechanism for tensioning the shaped sheet material.

Figure 8 is a cross section of the upper and lower sheet material, after being shaped, separated one from the other.

Figure 9 shows an already shaped sheet material, filling thereof with the material to be packed and closure of the front end of the corresponding molds.

Figure 10 is a partial cross section of the finished package, containing the product.

Figure 11 is a detailed view of the machine showing one of the two jaw sets forming the device for tensioning the sheets at the welding region.

Figure 12 is a perspective front view of a tensioning device comprised by clamps wherein relative movement between jaws cause tensioning of the sheets before sealing; and

Figure 13 is a partial cross section of one of said clamps of the tensioning device.

In the figures, the same reference symbols indicate the same or corresponding parts.

2025-03-07 10:00:00

**DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT.**

A substantially hollow head 10 wherein six nozzles 12 are provided, from which six tubes 11 project for distributing the product to be packed comprise the machine of the invention. Said head 10 is mounted on a cross member 13 rigidly connected to frame 14 of the machine, which comprises a pair of side brackets 15 between which a pair of shaping rollers, an upper roller 16 and a lower roller 17, are mounted. The upper shaping roller 16 at the cylindrical surface is provided with a plurality of channels 18, which being six, extend about six circumferences of the upper shaping roller 16 and are spaced by regions 19. Six channel 18 circumferences are provided on said upper shaper roller 16, matching with the distribution nozzles 12 in number.

Under the upper shaping roller 16 there is a second lower shaping roller 17, having the same features as the upper roller, i.e., having channels 20, which being six, extend about six circumferences of said roller 17 and are spaced by cylindrical regions 21, which in turn have corresponding channels 22 equal in depth to channels 20, which serve to housing distribution nozzles 12, as explained below. Both shaping rollers 16 and 17 have a tangential contact along their cylindrical surfaces, which are in front of nozzles 12 and distribution tubes 11, and are synchronized in order that

0947080-10390

corresponding regions 19 and 21 match during rotation of said rollers 16 and 17.

Cylindrical surfaces of rollers 16 and 17 are formed by various portions of modular envelopes which, as a whole, have a development equal to the corresponding cylindrical surface, which are designated with reference numeral 16' in figures 3 A and 3 B. In said figures, only the upper shaping roller 16 is shown, and the description hereinbelow refers thereto. Nevertheless, this description also serves for the lower shaping roller 17.

Channels 18 are formed in each modular envelope portion 16', being located as described. The particular feature is that at each circumference portion there are provided, separated by a single section 19, a larger channel region 18a and a smaller channel region 18b, having a blind end and the other end open towards the opposite straight edges of the envelope sector 16'.

As shown in figures 3 A and 3 B, the arrangement allows two mounting positions for obtaining two different lengths of sausages.

Between the distribution head 10 and the upper shaping roller 16, there is a shaft 23, parallel to the shaft of said roller 16 and close to the path of tubes 11, mounted on one of the side brackets 15 of the machine frame, such that it is resiliently collapsible with respect of the surface of roller 16. Said shaft 23 has a series of six rollers 24, rotating

2025 RELEASE UNDER E.O. 14176

therewith, the width and arrangement of which coincide with channels 18 of the upper shaping roller 16 and are housed therein, due to the resilient pressure of carrying shaft 23. Rollers 24 have a recess 25 the length and depth of which coincide with the cylindrical regions 19 of roller 16.

Between the distribution shaft 10 and the lower shaping roller 17 there is a shaft 26 parallel to the shaft of said roller 17 and close to the path of tubes 11, also mounted on one of the side brackets 15 of the machine frame. Said shaft 26 has, for rotating thereon, six narrow rollers 27, the width and arrangement thereof, matches with channels 20 of roller 17 and channels 22 of cylindrical portions 21.

The first portion of the machine is completed with two sheet plastic material feeding rollers for packaging the product; an upper roller 28 and a lower roller 29. Between the upper feeding roller 28 and the upper shaping roller 16 there is a tensioning-guiding roller 30 and between the lower feeding roller 29 and the lower shaping roller 17 there is a tensioning-guiding roller 31.

Both shaping rollers, upper roller 16 and lower roller 17, have at their ends, at both sides of the channeled surfaces, teeth rows 32, and 33, respectively, for maintaining plastic sheets 34 of the upper feeding roller 28 and sheet 35 of lower feeding roller 29 tensioned.

091700-1099

As shown in figures 1 and 2, tubes 11 made of flexible material pass between the two shaping rollers 16 and 17, such that they are housed in channels 22 of cylindrical portions 21 of the shaping roller 17.

Before entering and passing through shaping rollers 16 and 17, tubes 11 pass through a housing 36, which is connected to a forced air source (not shown), which will be described below.

It is important to note that the upper shaping roller 16 is heated, such that its temperature allows softening and deformation of the upper sheet 34, within channels 18, by the action of rollers 24, such that in said sheet part of the package is pre-formed or molded, before filling thereof. The same happens with shaping roller 17, sheet 35 and channels 20, except in that at the ends of mold 50 forming the body of the product to be packed, narrower passages are formed, the size of which correspond to that of tubes 11 and channels 22.

On the other side of shaping rollers 16 and 17, at the outlet of sheet material 35 and 34, there is a roller 37 for pressing longitudinal joints 52 of sheets 34 and 35, parallel to the shaping roller 16, at the side of molds 50 formed by rollers 16 and 17, the width of which is equal to the space between channels 18 of roller 16.

Parallel to the shaping roller 17 and beneath pressing roller 37, there is a cooling roller 38 on which sheets 34 and

35, already shaped, bear to obtain cooling of longitudinal joints 52.

At both sides of the path or travel of sheets 34 and 35, already joined by welding of longitudinal joints 52, between molds 50, shaped in channels 20 and 22, i.e., forward pressing roller 37 and cooling roller 38, there is a pair of mechanisms 39 effecting transversal tension with respect to sheets 34 and 35. Said mechanisms 39, shown in figure 2 and in figure 7 in more detail, are comprised by a lower fixed roller 40 mounted with free rotation on a support 41, such that roller 40 be outwardly inclined in an angle and in the direction of advancement of sheets 34 and 35.

Matching with roller 40 and thereabove, there is a pressing roller 42 which holds sheets 34 and 35, this pressing roller 42 presses, by a traction spring 43, said sheets 34 and 35 in order to maintain them in a tensioned position, transversally and outwardly from their advance path.

The machine continues in a closure and cooling table, comprising a pair of conveying chains 44 and 45, having therebetween welding and pressing cross members 60 and 60', which have pressing and welding elements 61, 61' made of an electrically conductive material for increasing the temperature while receiving electric power.

Lower 44 and upper 45 conveyor chains are overlapped, such that the lower portion of the upper chain 45 overlaps the upper

037030-0302260



portion of lower chain 44. At a certain distance from the inlet of sheet material 34-35 to said conveying chains 44-45, cross members 60 and 60' contact a plate 47 connected to an electrical source (not shown), thus producing heating of cross member 46-46' during the path over which this is in contact with plate 47.

Figures 1 and 2 show a side arrangement for plate 47 and, therein, the ends of cross members 60 and 60' contact. Also, said plate may have a transversal location with respect to the forward direction of sheet material 34-35 and, thus, parallel to cross members 60 and 60'; to this end, each cross member has upper contacts 62, as shown in figure 12.

Pressing cross members 60 and 60' are provided at the ends with means for tensioning the sheets before sealing them, thus avoiding problems derived from imperfections or wrinkles which may be formed on said sheets during operation, thus assuring perfect adherence without folds. Thus, at the ends of each cross member 60 of lower conveying chains 44 there are corresponding free rotating toothed wheels 63, while at the ends of each cross member 60' corresponding to the upper conveying chains 45 there are mounted toothed jaws 64. Each jaw 64 pivots on one end around a shaft 65 and is tensioned by a spring 66.

When cross members 60 and 60' are overlapped as shown in figures 12 and 13, the toothed surface of each jaw 64 of the

0947080-10998

upper cross member 60' is pressed, by the action of spring 66, against the corresponding toothed wheel 63 of the lower cross member 60.

Tensioning means act on side edges of sheets 34 and 35 and, in order to allow them to act free without affecting the container 50, the region molded and sealed of the sheets is far from said sides thereof, thus forming corresponding side strips 51 of excess material.

At the discharge end of the machine there are means for cutting and wrapping said strips 51 of excess material. These means comprises a pair of circular knives 70 mounted in a transversal eye 71 acted by an electrical engine 72 through a proper transmission 73. Strips 51 of sheet material are guided by rollers 74 to corresponding coils 75 that are mounted on a drive shaft 75 provided with a clutch (not shown).

As an example not limiting the scope of the invention, operation of the machine will be explained below, since the method is explained per se.

The paste for sausages is introduced under pressure through head 10 and through nozzles 12 to tubes 11, and in turn shaping rollers 16 and 17 are rotated by means of proper mechanisms; therefore sheet 34 is fed to roller 16. Due to the heat received from said roller 16, sheet 34 softens and is so deformed and molded with the shape of channels 18, by effect of

95207-0302750

rollers 24, the shape of mold 50 being then maintained in said channels 18 by hot air blown from housing 36.

Simultaneously, at the shaping roller 17, the sheet 35 is deformed at channels 20 through the effect of narrow rollers 27 providing a molded cavity 53 in said sheet 35 matching with molds 50 formed in sheet 34, but which at both ends of molded cavity 53, form a smaller cavity 54, determined by channels 22 of cylindrical portions 21.

Consequently, at the outlet of shaping rollers 16 and 17 and around tubes 11, a receptacle 48 for housing the sausage paste has been formed between mold 50 of the upper sheet 34 and the molded cavity 53 of lower sheet 35. Rollers 37 and 38 determine welding of the longitudinal joints 52 of said receptacles 18. Sheets 34 and 35, being connected at the sides by rows of teeth 32 and 33 of corresponding rollers 16 and 17, maintain the transversal tension and allow their deformation by means of rollers 24 and 27, by virtue of the above described tensioning system, constituted by mounting of sheets on the side jaws 63-64 (figures 12 and 13).

After sheets 34 and 35 exit, with receptacles 48 shaped, collapsing of the smaller cavity 54 formed by rollers 27 on sheet 35 is produced, and simultaneously filling of receptacles 48 with sausage paste is carried out. Since the smaller cavity 54 is closed, paste is subjected to the required pressure within receptacle 48. Collapsing of the smaller cavity 54 is

2025-03-04 10:00:00

produced by abutment of cross members 60 and 60' of corresponding conveying chains 44 and 45.

When receptacle 48 is filled with paste and under the required pressure, said receptacle 48 has advanced within conveying chains 44-45, therefore collapsing of the smaller cavity 54 of the lower portion of receptacle 48 is produced, and filling of the next receptacle 48 begins.

During advance of receptacle 48, with smaller front and rear cavities closed by cross members 60, 60', these contact electrical conductive plate 47, producing an increase in the temperature of corresponding elements 61-61', thus producing welding of sheets 34 and 35, in said smaller cavities 54, thus forming the sausage.

It is to be noted that collapsing of smaller cavities 54 by cross members 60-60' is produced such that the paste is housed therein displaces from the center to both sides, for producing afterwards heat sealing of said smaller cavities 54.

The packed sausages advance to the outlet end of the machine, wherein the means for cutting and wrapping excess side strips 51' of the package 50 formed by sheets 34 and 35 are located.

96E20T"030260

**CLAIMS:**

1. Process for the continuous manufacture of sausages, comprising the following steps:

- . continuous feeding of a pair of sheets, one above and the other below tubes feeding the paste forming the product to be packaged,

- . continuously forming at the upper sheet individual molds for the product to be packed;

- . simultaneously forming at the lower sheet, individual molds corresponding to the molds of the upper sheet, but connected one to the other by cavities narrower than those of said individual molds, the size of which allows the housing of feeding tubes;

- . tensioning the sheets at least at the sealing regions between them;

- . longitudinally sealing the sheets on both sides of said individual molds;

- . advancing said individual molds thus formed beyond the outlet of said feeding tubes, closing under pressure the narrowest cavity at the front region of the mold;

- . filling the product to be packed under proper pressure, in a continuous way, along with the container of sheets shaped by the molds;

0947080-10390

. pressure closing the narrowest cavity at the rear portion of the individual mold thus filled in, closing in turn the front part of the following mold, and

. heat sealing the narrowest cavities closed under pressure.

2. Machine for carrying out the process of claim 1, comprising a pair of rollers, which contact in a parallel and tangential manner, driving corresponding thermoplastic sheet materials, one of said rollers having means for shaping half of the individual molds of the product to be packed, while the other roller is also provided with means for shaping half of the individual molds for the product to be packed, said other halves being provided with means communicating one with the other; a device for feeding the product to be packed having a plurality of feeding means extending between said sheet materials, through the communication means of said other roller, both rollers being provided with means for sealing planar joints of said sheet materials, means for cooling said planar joints at the outlet of said rollers and means for pressing and sealing the transversal joints of said individual molds thus formed; at the outlet end of the machine, following said pressing and sealing means, there being means for cutting excess sheet material from the packed product and means for wrapping said excess sheet material.

094000-1039



## ABSTRACT OF THE DISCLOSURE

Process and machine for the continuous manufacture of sausages, wherein a pair of thermoplastic sheets is continuously fed, one sheet above and the other below tubes for feeding the paste forming the sausages to be packed; simultaneously and continuously, in such sheets are formed, by the action of corresponding heated shaping rollers, corresponding individual molds, said molds of both sheets being capable of being faced in a matching fashion, and the molds of the lower sheet being connected by narrower cavities the size of which allows housing of the feeding tubes; then sheets are tensioned in at least the sealing portions thereof; and said sheets are longitudinally sealed at both sides of said individual molds; the individual molds thus formed being advanced beyond the outlet of said feeding tubes, up to the position of the sealing means closing under pressure the narrowest cavity of the front portion of the mold; then the product to be packed is filled under proper pressure, in a continuous way, and the narrowest cavity of the rear part of the individual mold thus filled in is closed under pressure, in turn closing the front portion of the following mold, and sealing by heat the narrowest cavities previously closed under pressure.

0917080-102398



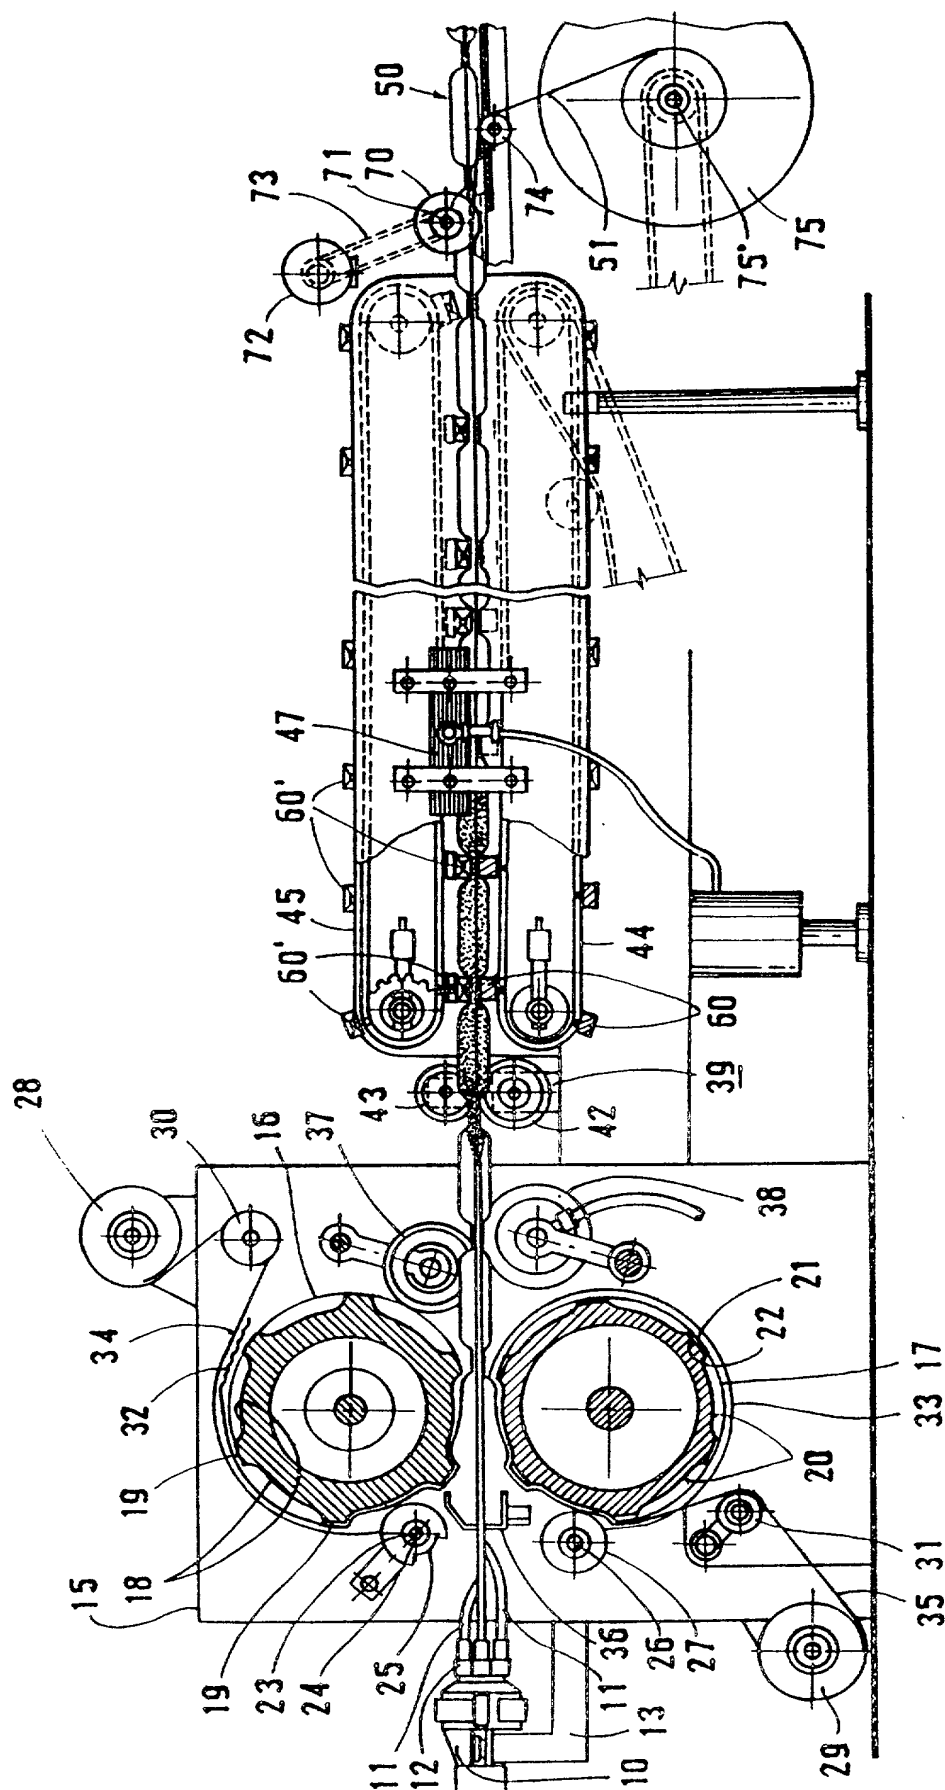


Fig.1

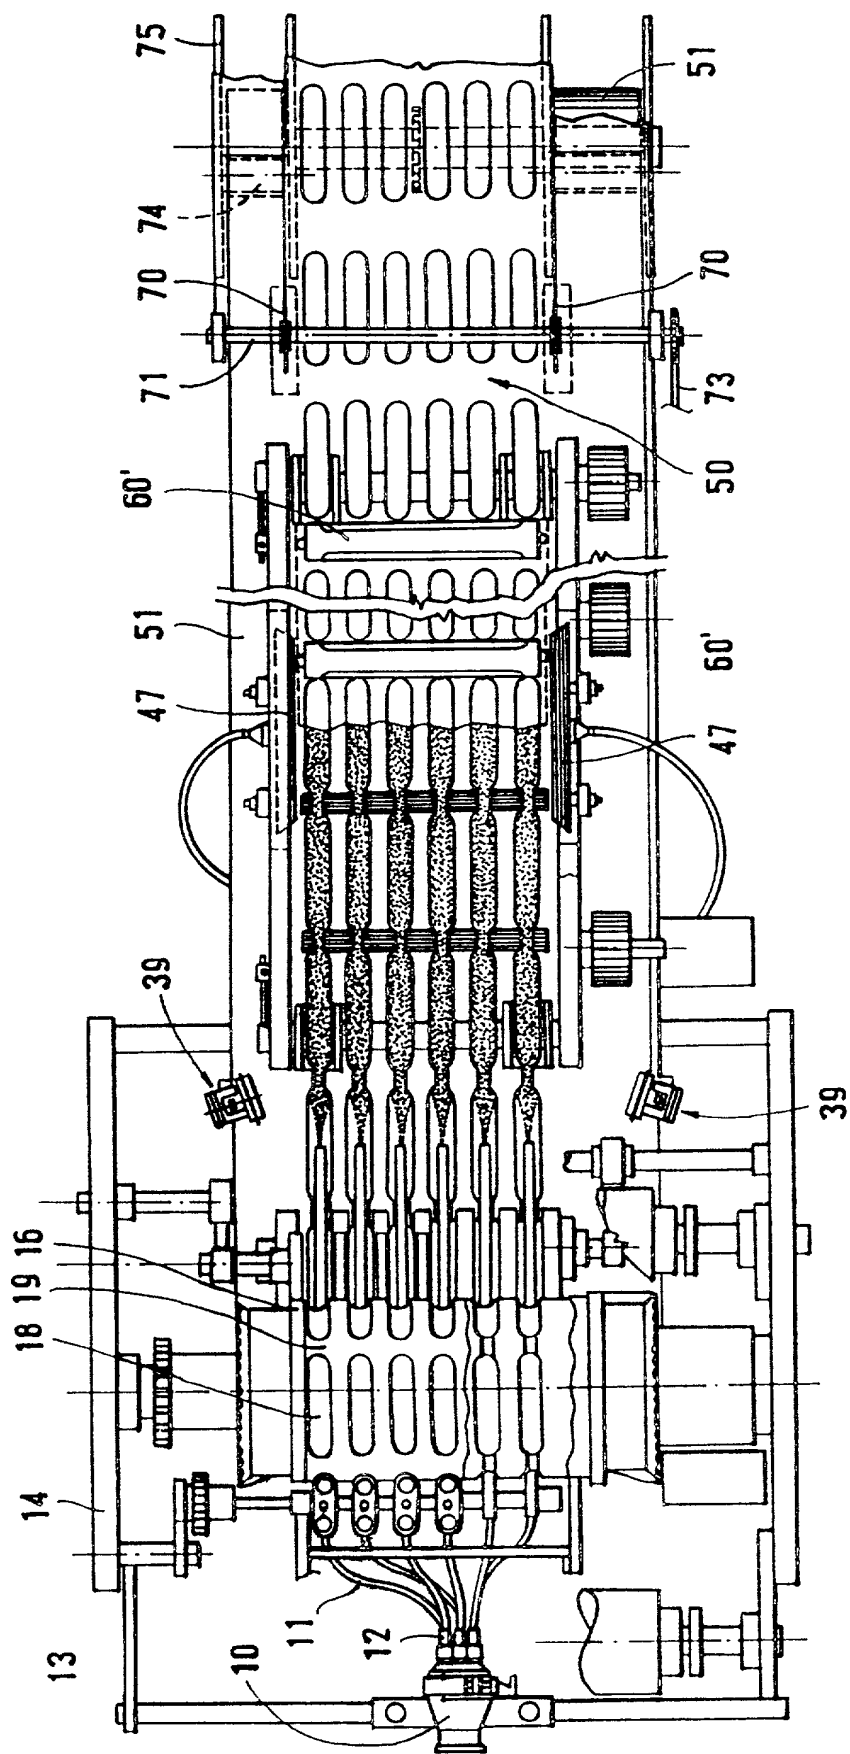

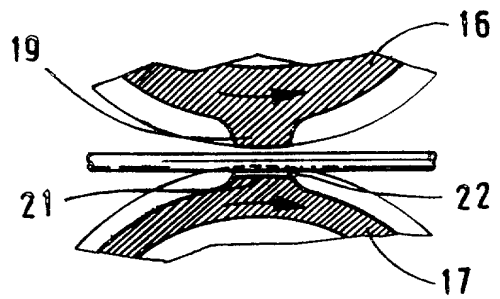
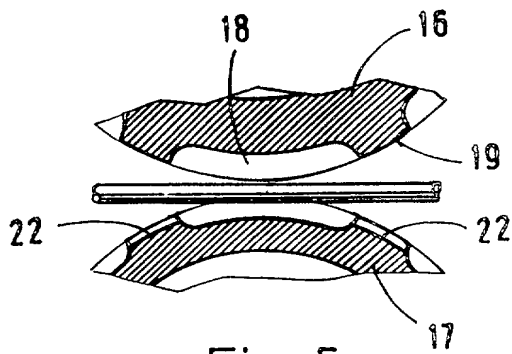
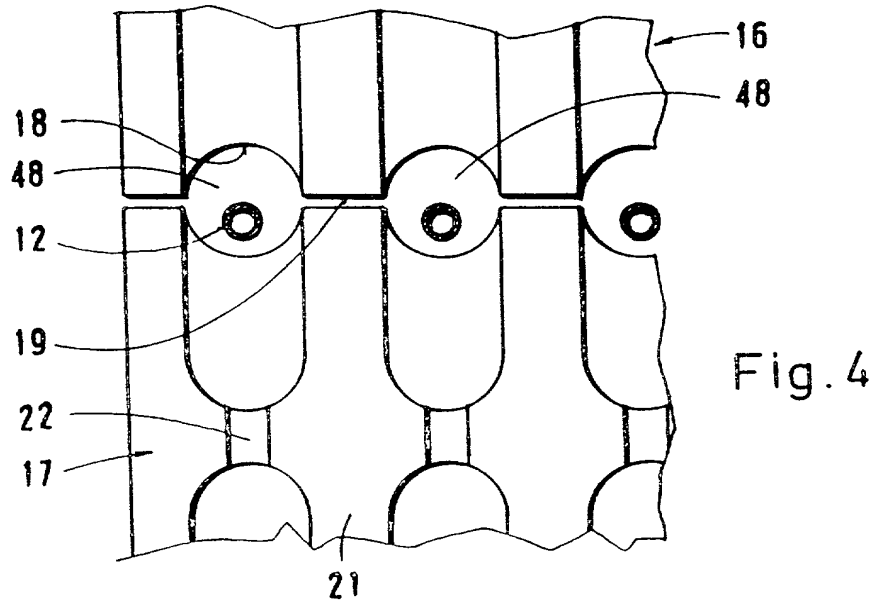
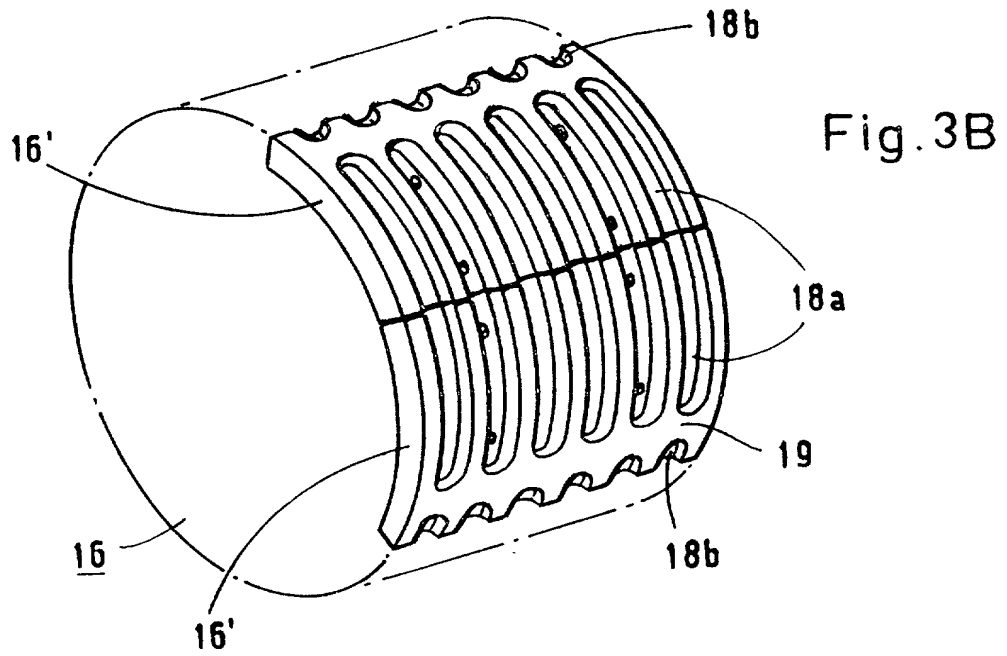


Fig. 2





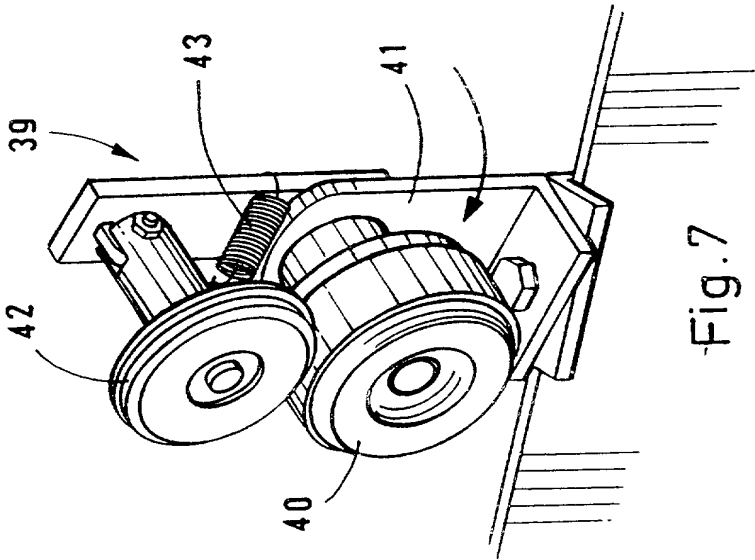


Fig. 7

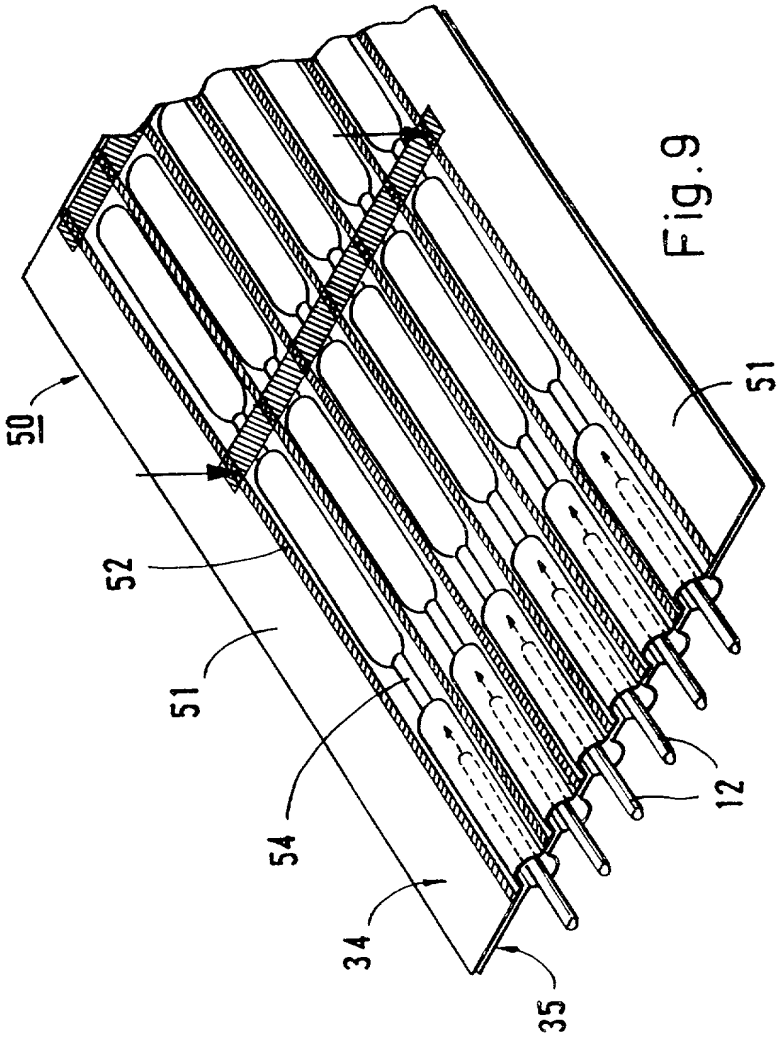


Fig. 9

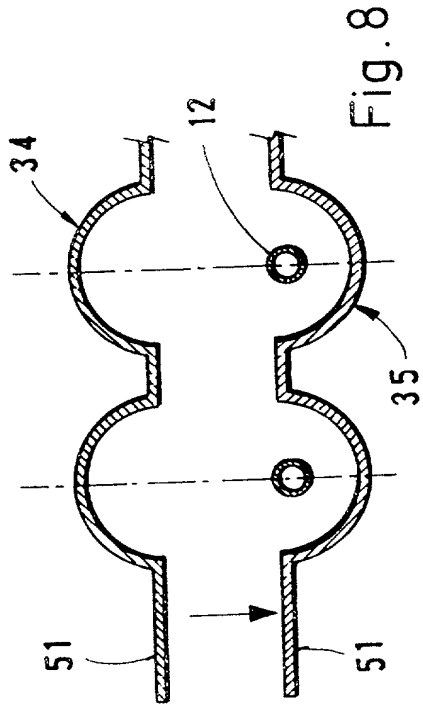


Fig. 8

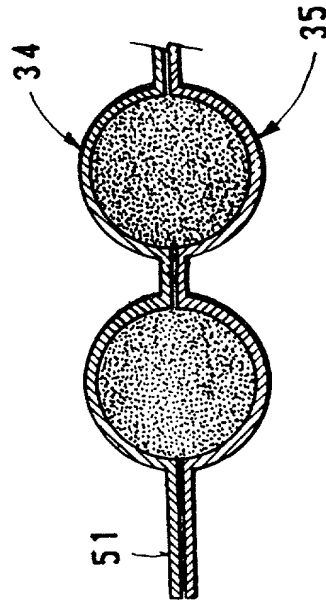


Fig. 10

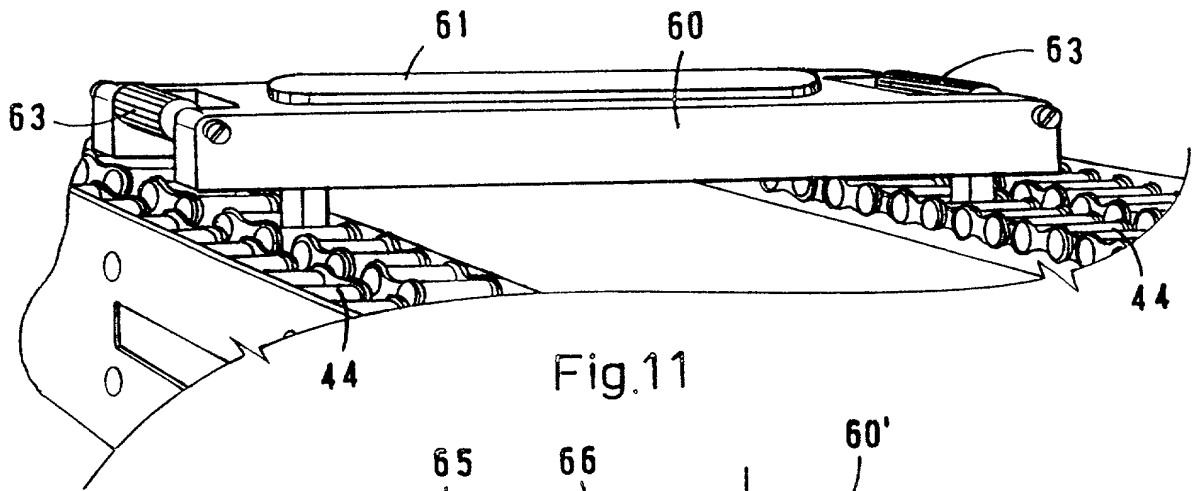


Fig.11

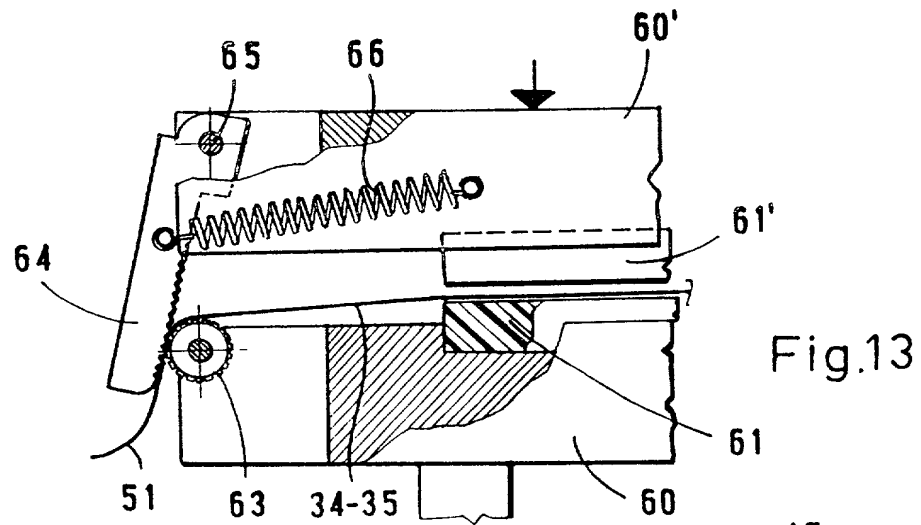


Fig.13

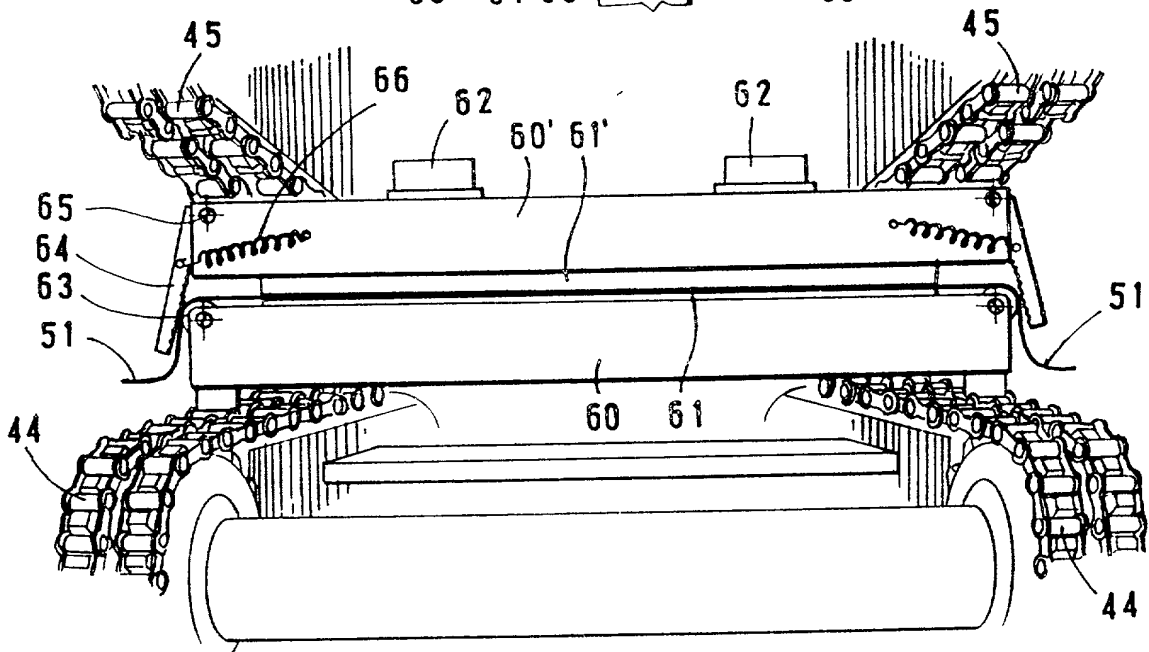


Fig.12

**DECLARATION  
AND POWER OF ATTORNEY  
U.S.A.**

FOR ATTORNEYS' USE ONLY

ATTORNEYS' DOCKET NO.  
P63073US0

ALL PATENTS, INCLUDING DESIGN  
FOR APPLICATION BASED ON PCT, PARIS CONVENTION,  
NON PRIORITY, OR PROVISIONAL APPLICATIONS

As a below named inventor, I declare that my residence, post office address and citizenship are stated below next to my name, the information given herein is true, that I believe that I am the original, first and sole inventor (if only one name is listed at 201 below), or a first and joint inventor (if plural inventors are named below at 201-203, or on additional sheets attached hereto) of the subject matter which is claimed and for which patent is sought on the invention entitled:

**PROCESS FOR THE CONTINUOUS MANUFACTURE OF SAUSAGES**

which is described and claimed in: ☐ PCT International Application No. \_\_\_\_\_ filed \_\_\_\_\_  
to the attached specification ☐ the specification in application Serial No. \_\_\_\_\_ filed \_\_\_\_\_  
(if applicable) and amended on \_\_\_\_\_

I hereby state that I have reviewed and understand the contents of the above-identified specifications, including the claims, as amended by any amendment referred to above.  
I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, §1.56  
I hereby claim foreign priority benefits under Title 35, United States Code, §119 (a)-(d) of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)			Priority Claimed
(Number)	(Country)	(Day/Month/Year Filed)	<input type="checkbox"/> Yes <input type="checkbox"/> No
_____	_____	_____	<input type="checkbox"/> Yes <input type="checkbox"/> No
_____	_____	_____	<input type="checkbox"/> Yes <input type="checkbox"/> No
_____	_____	_____	<input type="checkbox"/> Yes <input type="checkbox"/> No

I hereby claim the benefit under Title 35, United States Code, §119(e) of any United States provisional application(s) listed below:  
Application No. \_\_\_\_\_ Filing Date \_\_\_\_\_ Application No. \_\_\_\_\_ Filing Date \_\_\_\_\_

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of such of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, §1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application:

_____ (Application Serial No.)	_____ (Filing Date)	_____ (Status: patented, pending, abandoned)
--------------------------------	---------------------	--

**POWER OF ATTORNEY:** As a named inventor, I hereby appoint the following attorneys (Registration No.) to prosecute this application, receive and act on instructions from my agent, and transact all business in the Patent and Trademark Office connected therewith. HARVEY B. JACOBSON, JR. (20,851); D. DOUGLAS PRICE (24,514); JOHN CLARKE HOLMAN (22,769); MARVIN R. STERN (20,640); MICHAEL R. SLOBASKY (26,421); JONATHAN L. SCHERER (29, 851); STANFORD W. BERMAN (17,909); IRWIN M. AISENBERG (19,007); WILLIAM E. PLAYER (31,409)

SEND CORRESPONDENCE TO:

**JACOBSON, PRICE, HOLMAN & STERN**  
PROFESSIONAL LIMITED LIABILITY COMPANY  
400 Seventh Street, N.W.  
Washington, D.C. 20004

DIRECT TELEPHONE CALLS TO:  
(please use Attorney's Docket No.) (202) 638-6688

**JACOBSON, PRICE, HOLMAN & STERN**  
PROFESSIONAL LIMITED LIABILITY COMPANY

\*Inventor(s) name must include at least one unabbreviated first or middle name.

201	FULL NAME* OF INVENTOR	FAMILY NAME <b>SCHULTZ</b>		GIVEN NAME <b>Antonio</b>		MIDDLE NAME <b>Jorge</b>	
	RESIDENCE & CITIZENSHIP	CITY <b>LÓMAS DE ZAMORA</b>		STATE OR FOREIGN COUNTRY <b>BUENOS AIRES</b>		COUNTRY OF CITIZENSHIP <b>ARGENTINA</b>	
	POST OFFICE ADDRESS	POST OFFICE ADDRESS =====		CITY =====		STATE OR COUNTRY =====	ZIP CODE =====
	FULL NAME* OF INVENTOR	FAMILY NAME		GIVEN NAME		MIDDLE NAME	
202	RESIDENCE & CITIZENSHIP	CITY		STATE OR FOREIGN COUNTRY		COUNTRY OF CITIZENSHIP	
	POST OFFICE ADDRESS	POST OFFICE ADDRESS		CITY		STATE OR COUNTRY	ZIP CODE
	FULL NAME* OF INVENTOR	FAMILY NAME		GIVEN NAME		MIDDLE NAME	
	RESIDENCE & CITIZENSHIP	CITY		STATE OR FOREIGN COUNTRY		COUNTRY OF CITIZENSHIP	
203	POST OFFICE ADDRESS	POST OFFICE ADDRESS		CITY		STATE OR COUNTRY	ZIP CODE

I further declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that those statements were made with the knowledge that willful false statements and the like as made are punishable by fine or imprisonment or both, under section 1001 of Title 18 of the United States Code; and that such willful false statements may jeopardize the validity of the application of any patent issuing thereon.

SIGNATURE OF INVENTOR 201* <b>ANTONIO SCHULTZ</b>	SIGNATURE OF INVENTOR 202* =====	SIGNATURE OF INVENTOR 203* =====
DATE <b>20-10-1998</b>	DATE	DATE

Law Offices of  
**JACOBSON, PRICE, HOLMAN & STERN, PLLC**  
THE JENIFER BUILDING  
400 SEVENTH STREET, N.W.  
WASHINGTON, D.C. 20004

Att'y's Docket No. P63073USQ

**SMALL ENTITY DECLARATION**  
[37 CFR 1.9(c-f)]

Each undersigned declares that:

- (1) ☒ the application attached hereto.
- (2) ☐ U.S. Application Serial No. \_\_\_\_\_, filed \_\_\_\_\_
- (3) ☐ U.S. Patent No. \_\_\_\_\_ issued \_\_\_\_\_  
is entitled to the benefits of "small entity" status for paying reduced fees under 35 USC 41(a) and (b) to the Patent and Trademark Office by virtue of the following:
- (4) ☐ Each undersigned declares that he/she qualifies as an independent inventor, or would qualify had he/she made the invention, as defined in 37 CFR 1.9(c).
- (5) ☒ The undersigned declares that he/she is an official empowered to act on behalf of the concern identified below; that this concern qualifies as a small business concern as defined in 37 CFR 1.9(d); that exclusive rights to the invention have been conveyed to and remain with the small business concern, or if the rights are not exclusive, that all other rights belong to small entities as defined in 37 CFR 1.9.
- (6) ☐ The undersigned declares that he/she is an official empowered to act on behalf of the organization identified below; that this organization qualifies as a nonprofit organization as defined in:
- (a) ☐ 37 CFR 1.9(e)(1)
- (b) ☐ 37 CFR 1.9(e)(2)
- (c) ☐ 37 CFR 1.9(e)(3)
- (d) ☐ 37 CFR 1.9(e)(4) State law of \_\_\_\_\_  
that exclusive rights to the invention have been conveyed to and remain with the organization, or if the rights are not exclusive, that all other rights belong to organizations as defined in 37 CFR 1.9.
- (7) Each person, concern or organization to which I/we have assigned, granted, conveyed or licensed, or am under an obligation under contract or law to assign, grant, convey, or license any rights in the invention is listed below:
- (a) ☐ no such person, concern or organization
- (b) ☒ persons, concerns or organizations listed below  
[a separate declaration is required from each named person, concern or organization having rights to this invention averring to their status as "small entities."]

Full Name FRIGORIFICO SAN CARLOS SOCIEDAD ANONIMA  
Address Araujo 956, Buenos Aires, Republic of Argentina

☐ Individual ☒ Small Business Concern ☐ Nonprofit Organization

I/we acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss of entitlement of small entity prior to paying, or at the time of paying, the earliest of the issue fee or any maintenance fee due after the date on which status as a small entity is no longer appropriate. (37 CFR 1.28(b))

I/we hereby declare that all statements made herein of his/her own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application, any patent issued thereon, or any patent to which this declaration is directed.

(8)

Typed Name of Inventor	Signature	Date
Typed Name of Inventor	Signature	Date
Typed Name of Inventor	Signature	Date
Typed Name of Inventor	Signature	Date

(9) FRIGORIFICO SAN CARLOS SOCIEDAD ANONIMA  
Name of Small Business Concern or Nonprofit Organization

Carlos Aznar By [Signature] Date 20-10-1998  
Typed Name Signature Date

Director  
Title of Signatory